


KERR

PUMPS

KB-3500BCB

73.1 BHP Triplex Plunger Pump

Intermittent Duty

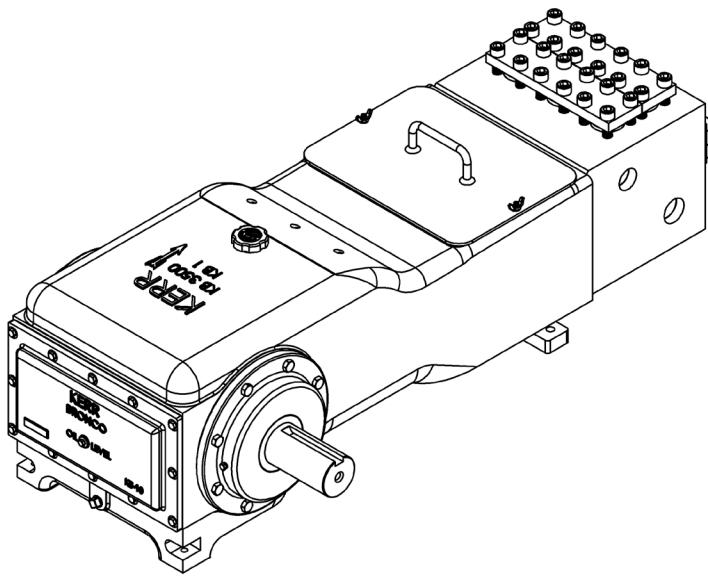

KB-3500BCB RH

SPECIFICATIONS

Configuration	Horizontal Triplex Plunger
Number of Plungers	3
Stroke Length	5" / 127 mm
Frame Load Rating	4,513 lbs
Fluid Cylinder Pressure Rating	15,000 PSI
Pump Weight (Avg.)	1,500 lbs / 682 kilos
Kerr Max Speed	385 RPM
Minimum Speed	100 RPM
Mechanical Efficiency (Bare Shaft)	90%
Lube System (Standard)	Splash
Lube System (Optional)	Force Feed
Lube Oil Capacity	20 quarts / 18.93 liters
Lube Oil Type	Petroleum per AGMA 5EP (ISO 220) or Synthetic per SAE 75W-90 (ISO 100)
Connection Sizes	1 1/2" NPT Suction 1 1/4" NPT Discharge

FLUID END

Forged Carbon Steel (A105)
Forged Stainless Steel (316)
Other materials available on request

PLUNGERS

Colmonoy 730 Hard Coat
Solid Ceramic (2,160 Max. PSI)
Kerramic (Ceramic) Coated
Solid 316 Stainless Steel

VALVES

BALL VALVE / SEAT MATERIAL	
Stanalloy / Stanalloy (440 SS)	
Sheralloy / Seralloy (Cobalt Base)	

* Consult Factory for Authorized Drawings for Dimensions

1) Displacement is based on 100% Volumetric Efficiency (VE)

2) Consult factory for operating speeds above maximum shown

3) 1 US gallon = 3.78541 liters






KERR

PUMPS

KB-3500BCB

73.1 BHP Triplex Plunger Pump

Intermittent Duty

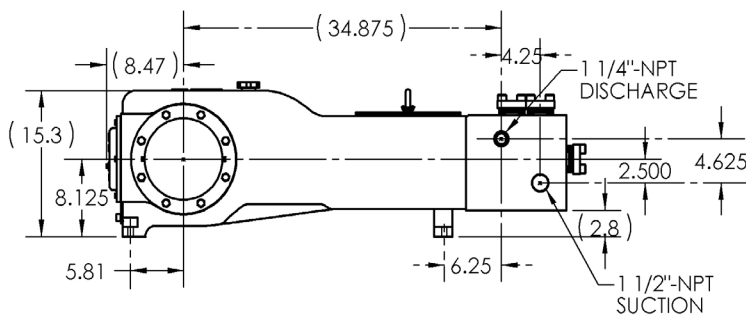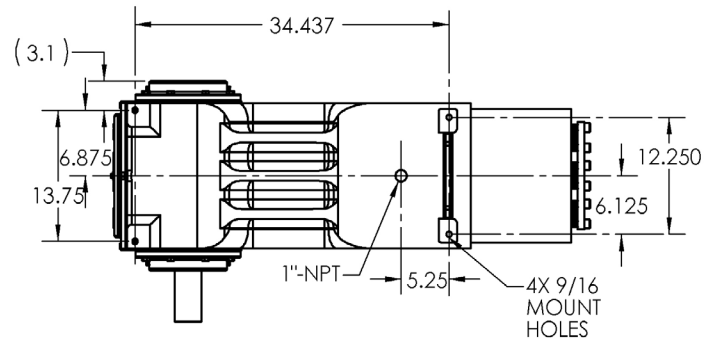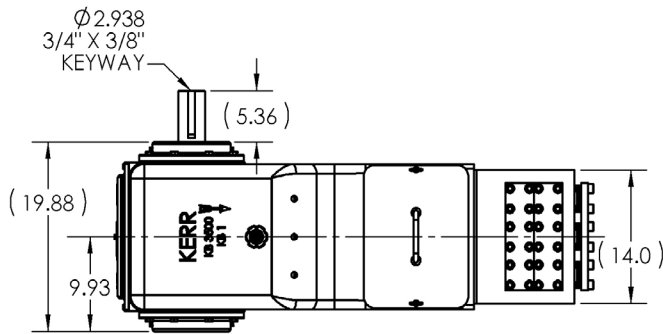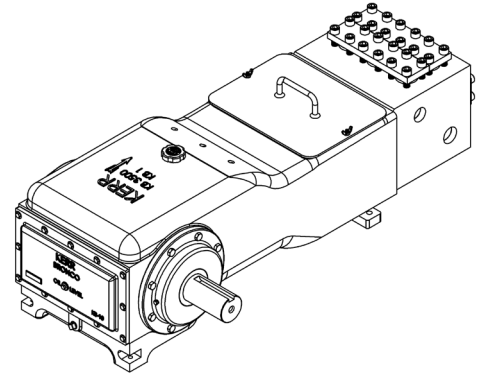

PLGR DIA. INCHES	MAX PRESS PSI	DISP GAL PER REV	DISPLACEMENT																	
			100 RPM		140 RPM		175 RPM		210 RPM		245 RPM		280 RPM		315 RPM		350 RPM		385 RPM	
			GPM	BPD	GPM	BPD	GPM	BPD	GPM	BPD	GPM	BPD	GPM	BPD	GPM	BPD	GPM	BPD	GPM	BPD
0.875	7504	0.0390	3.9	134	5.5	188	6.8	234	8.2	281	9.6	328	10.9	375	12.3	422	13.7	469	15.0	516
1.000	5745	0.0510	5.1	175	7.1	245	8.9	306	10.7	367	12.5	429	14.3	490	16.1	551	17.8	612	19.6	673
1.250	3677	0.0797	8.0	273	11.2	383	13.9	478	16.7	574	19.5	670	22.3	765	25.1	861	27.9	957	30.7	1052

* Consult Factory for Authorized Drawings for Dimensions

1) Displacement is based on 100% Volumetric Efficiency (VE)

2) Consult factory for operating speeds above maximum shown

3) 1 US gallon = 3.78541 liters

WWW.KERRPUMPS.COM | 800-441-8149
ISO 9001:2008 REGISTERED | API 674 SECOND EDITION