




T40M

166 BHP Triplex Plunger Pump

Intermittent Duty

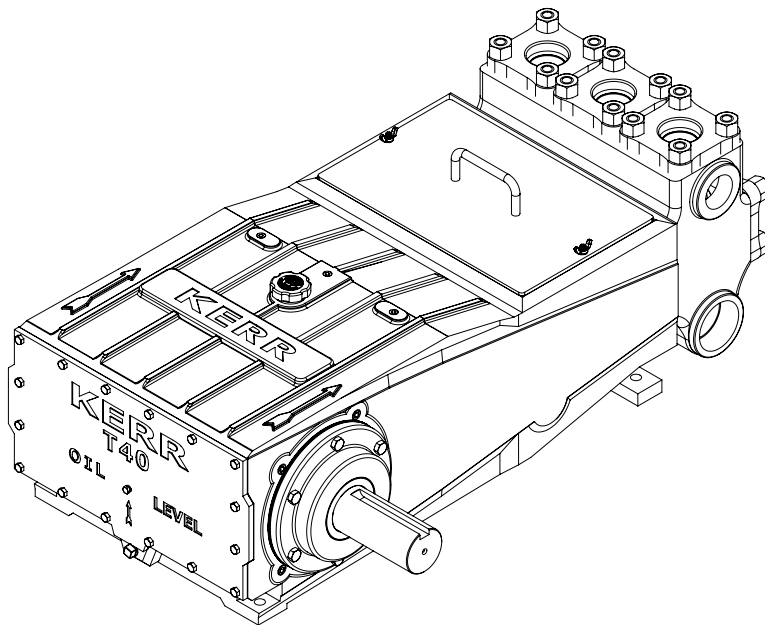

SPECIFICATIONS

Configuration	Horizontal Triplex Plunger
Number of Plungers	3
Stroke Length	4.000" / 101.6 mm
Frame Load Rating	11,432 lbs
Fluid Cylinder Pressure Rating	2,160 PSI
Pump Weight (Avg.)	1200 lbs / 545 kilos
Kerr Max Speed	420 RPM
Minimum Speed	100 RPM
Mechanical Efficiency (Bare Shaft)	90%
Lube System (Standard)	Splash- Gravity Feed
Lube System (Optional)	Force Feed
Lube Oil Capacity	21 quarts / 20.2 liters
Lube Oil Type	Petroleum per AGMA 5EP (ISO 220) or Synthetic per SAE 75W-90 (ISO 100)
Connection Sizes	3" NPT Suction 2" NPT Discharge

FLUID END

Cast Ductile Iron (65-45-12)
Cast Carbon Steel (WCB)
Cast Nickel Aluminium Bronze (955)
Cast Stainless Steel CF8M (316)
Cast Duplex SS CD3MN (2205)
Forged Carbon Steel (A105)
Forged Stainless Steel (316)

VALVES

DISC TYPE / SEAT (MAX. 2,160 PSI)	WING GUIDED
Delrin Disc / SS (316)	Ni-Al-Brz (955) / Metal-to-Metal
Delrin / Ni-Al-Brz (955)	Monel / Metal-to-Metal
Delrin / Duplex SS (CD4MCU)	SS (316) / Metal-to-Metal
SS (316) / SS (316)	17-4 HT Metal-to-Metal
Titanium / SS (316)	SS (316) / AR Urethane Inserted
PEEK / SS (316)	17-4 HT / AR Urethane Inserted

PLUNGERS

Colmonoy 730 Hard Coat
Solid Ceramic (2,160 Max. PSI)
Kerramic (Ceramic) Coated
Solid 316 Stainless Steel

* Consult Factory for Authorized Drawings for Dimensions

1) Displacement is based on 100% Volumetric Efficiency (VE)

2) Consult factory for operating speeds above maximum shown

3) 1 US gallon = 3.78541 liters



KERR

PUMPS

T40M

166 BHP Triplex Plunger Pump

Intermittent Duty

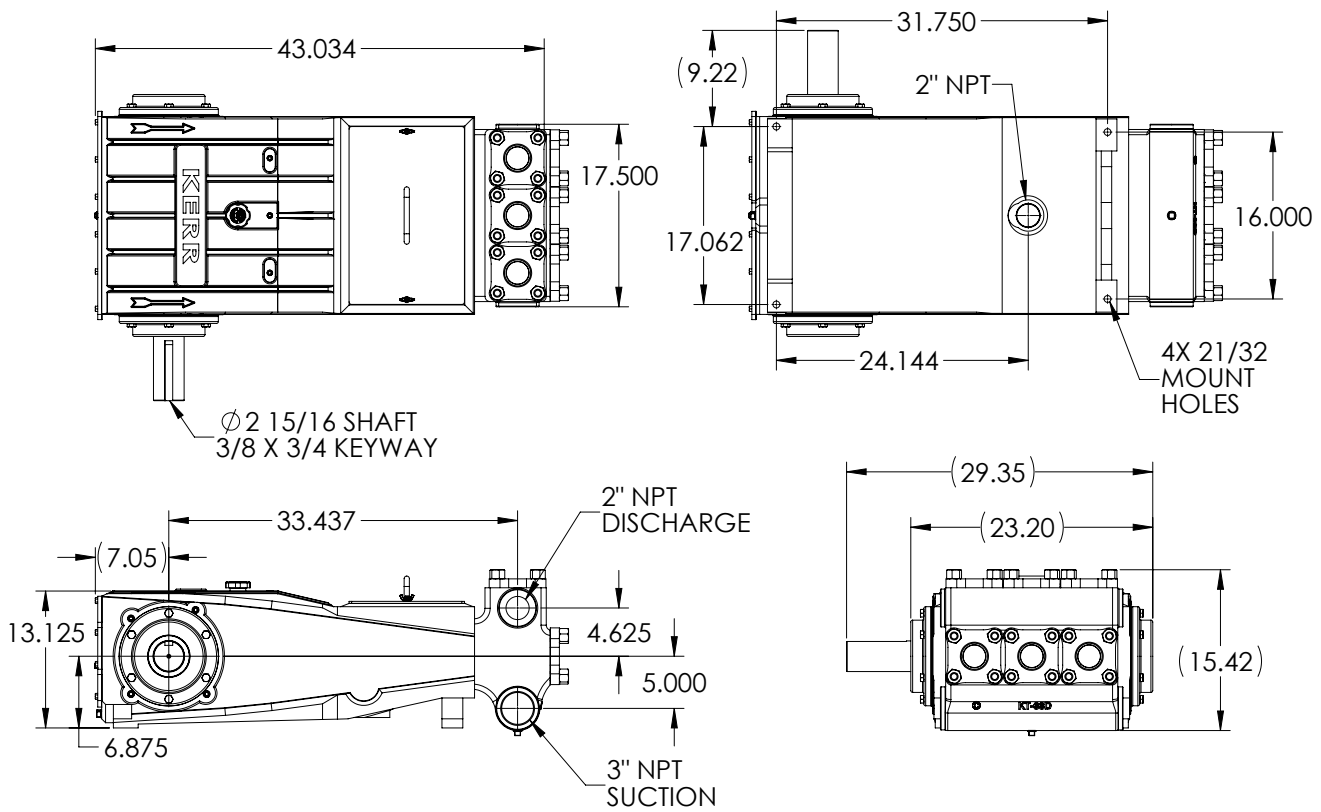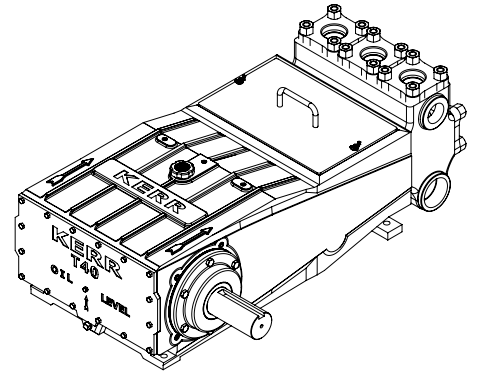

PLGR DIA. INCHES	MAX PRESS PSI	DISP GAL PER REV	DISPLACEMENT																	
			100 RPM		140 RPM		180 RPM		220 RPM		260 RPM		300 RPM		340 RPM		380 RPM		420 RPM	
			GPM	BPD	GPM	BPD	GPM	BPD	GPM	BPD	GPM	BPD	GPM	BPD	GPM	BPD	GPM	BPD	GPM	BPD
2.000	2160	0.1632	16.3	560	22.8	784	29.4	1008	35.9	1232	42.4	1455	49.0	1679	55.5	1903	62.0	2127	68.5	2351
2.250	2160	0.2065	20.7	708	28.9	992	37.2	1275	45.4	1559	53.7	1842	62.0	2125	70.2	2409	78.5	2692	86.8	2976
2.500	2160	0.2550	25.5	875	35.7	1225	45.9	1574	56.1	1924	66.3	2274	76.5	2624	86.7	2974	96.9	3324	107	3674
2.750	1925	0.3085	30.9	1058	43.2	1482	55.5	1905	67.9	2328	80.2	2752	92.6	3175	105	3598	117	4022	130	4445
3.000	1617	0.3672	36.7	1259	51.4	1763	66.1	2267	80.8	2771	95	3275	110	3778	125	4282	140	4786	154	5290

* Consult Factory for Authorized Drawings for Dimensions

1) Displacement is based on 100% Volumetric Efficiency (VE)

2) Consult factory for operating speeds above maximum shown

3) 1 US gallon = 3.78541 liters

WWW.KERRPUMPS.COM | 800-441-8149
ISO 9001:2008 REGISTERED | API 674 SECOND EDITION